

Belgacom Maestro™ 1045

User manual



belgacom

Table of contents

Table of contents	1
Introduction	2
Contents of the box	3
Overview of the Maestro 1045	4
Installing the telephone	6
Safety instructions	6
Installing the telephone	6
Mounting the telephone on the wall	7
Making calls	9
Making calls	9
Accepting an incoming call	9
Disconnecting	9
Last number redial	9
Switch microphone off/on	9
Flash key (calibrated interruption)	9
Personal settings	10
Setting the ring tone	10
Setting the volume	10
Troubleshooting	11
What to do in the event of malfunctions	11
Malfunctions when making a call	11
Repairs	12
Recycling	12
Technical details	13
Declaration of conformity	14
Guarantee terms	15
Wall mounting	19

Introduction

Thank you for choosing the Belgacom Maestro 1045, a telephone that can be used at home and in the office. This telephone has been designed for connection to the analogue telephone network of Belgacom.

Contents of the box


We advise you to check the contents of the box before installing the telephone. These are the contents:

- ❶ Receiver
 - ❷ Telephone base
 - ❸ Line cord
 - ❹ 5-pin plug
 - ❺ Coiled cord
- 2 screws and 2 plugs
 - User manual

If you find that any of the parts are missing, please return the telephone in its box to the Teleboetiek shop, and show your receipt.




Overview of the Maestro 1045

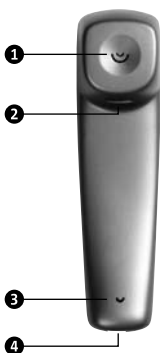




Receiver

- 1 Earpiece
- 2 Suspension point on receiver for wall mounting
- 3 Microphone (mouthpiece)
- 4 Connection for coiled cord





Telephone base, top

- 5 Receiver contact
- 6 Suspension clip on receiver for wall mounting
- 7  Microphone off/on
- 8  Flash key (switch between conversations, call waiting, put through)
- 9  Last number redial






Telephone base, side

- 10  Sound level switch



Telephone base, underside

- 11 Suspension section with suspension points for wall mounting
- 12 Cord guide for line cord
- 13  Connection point for line cord
- 14  Connection point for coiled cord
- 15  Ring tone volume switch: high/low
- 16 Cord guide for coiled cord

Installing the telephone



Safety instructions

- Do not use the telephone in humid or dusty conditions, a gas-logged environment or an environment in which the telephone would come into contact with water.
- Do not expose the telephone to sunrays or other heat sources.
- Do not place the telephone on a slippery or unstable surface, and place it at least one metre away from any other devices that may cause interference, such as wireless devices, pagers, TVs, industrial devices, etc.
- Do not place the device on furniture that has been treated with synthetic varnish. The synthetic feet and the varnish may react, causing stains.
- Clean the telephone with a damp or anti-static cloth. Do not use dry cloths or corrosive cleaning agents.
- Each of these conditions may negatively affect the good performance or intended use of the product.
- Keep this manual and observe the environmental regulations when the telephone is taken out of service.

Installing the telephone

Note!


Connect the line cord to the telephone base first, then to the telephone socket. Failure to do so may lead to electric shocks, as the telephone socket is live.

- 1 Click one mini plug of the coiled cord into the connection point  at the bottom of the telephone base. Click the other mini plug into the connection point of the receiver.
- 2 Click one mini plug of the line cord into the connection point  at the bottom of the telephone base. Click the other mini plug into the 5-pin plug.

- 3 Guide the cords through the cord guides at the bottom of the telephone base.
- 4 Plug the 5-pin plug into the telephone socket.
- 5 Pick up the receiver and check for a dialling tone.
- › The telephone is now ready for use.

Mounting the telephone on the wall


- 1 Use a screwdriver to turn the suspension clip in the receiver holder on the telephone base. This will make part of the clip stick out (picture 1). The receiver will be suspended from the clip.



Picture 1: turn suspension clip


- 2 On the wall, mark 2 screw holes beneath each other. Use the drawing for wall mounting on page 19 if so required. Now drill 2 holes, each with a diameter of 6 mm. The distance between the 2 screw holes is 100 mm.
- 3 Stick wall plugs into the holes and turn the screws into the plugs until the screws stick out by about 5 mm.
- 4 Remove the suspension section from the bottom of the telephone base: use both thumbs to push in points ① and ②, while at the same time sliding the section downwards with your index finger(s) (picture 2).

- › You will hear a click to indicate it has come loose.




Picture 2: remove suspension section

- 5 Turn the section over and place it in the slots in the centre of the telephone base (picture 3).
- › You will hear a click to indicate it is secured.



Picture 3: attach suspension section

- 6 Now carefully slide the suspension points of the telephone base across the 2 screws until the base is properly secured, and place the receiver (picture 4).



Picture 4: Mounting the telephone

Making calls

Making calls

- 1 Pick up the receiver and wait for the dialling tone.
- 2 Enter the telephone number.


Accepting an incoming call

- › The telephone starts ringing.
- 1 Pick up the receiver to answer the call.


Disconnecting

- 1 Place the receiver back on the telephone base, or press the receiver contact.


Last number redial


- 1 Pick up the receiver and wait for the dialling tone.
- 2 Press . The number you dialled last will be dialled again.

Switch microphone off/on

- 1 During the call, press and hold  in order to temporarily switch off the microphone. The other caller can no longer hear you.
- 2 Release the key to reactivate the microphone.


Flash key (calibrated interruption)

Your Maestro 1045 supports the Belgacom Comfort Services, such as accepting a second call, call waiting, and a conversation between three callers (conference call). You can make use of these services by means of the  key. Please contact Belgacom for further information.


When your Maestro 1045 is connected to a domestic exchange (PABX), you can use the  key for things such as putting calls through.

Personal settings

Setting the ring tone

Use the switch  on the bottom of the telephone base to change the ring tone volume to high or low.

Setting the volume

Use the switch  on the right side of the telephone base to change the receiver's sound level during a call (3 settings).

Troubleshooting

What to do in the event of malfunctions

If there is no dialling tone or if you are unable to make a call, follow the instruction given below:

- 1 Check whether the telephone has been installed correctly (see page 6).
- 2 Check for damage to the line cord.
- 3 Disconnect all peripheral equipment, extension leads and other telephones and test the Maestro 1045 directly on a different telephone line, which you know to be in working order. If the telephone works, the fault is probably in your own telephone line.

Malfunctions when making a call

Problem You receive a call, but you cannot hear the ring tone, or the ring tone volume is too low.

Cause (1) The ring tone volume is set to low.

Solution Use the switch at the bottom of the telephone base to set the ring tone volume to high.

Cause (2) Too many telephones are connected to the line.

Solution Disconnect one or more telephones.

Problem The sound breaks up.

Cause Multiple telephones are being used simultaneously.

Solution Continue the call with only one telephone.

Problem You are unable to use the flash button or put a call through.

Cause The Maestro 1045 is connected to a domestic exchange (PABX) which is set to earth signals. The telephone base only functions on flash signals.

Solution Makes sure that the PABX is set to flash signals (see the manual of your PABX).

Repairs

If you are unable to solve the problem, you can take the entire telephone set to a Teleboetiek shop. Also bring the completed warranty card and your receipt if the telephone is still within its warranty period. You can also call Belgacom customer services.

Recycling

Natural resources were tapped and used for the production process of the telephone you have purchased. This equipment may contain substances that are harmful to your health and the environment. In order to prevent these substances from entering the environment and to prevent the waste of natural resources, we ask you to use the correct return & collection systems. Those systems will correctly reuse or recycle most of the materials that constitute your used equipment.



The symbol of the crossed-out wheelee-bin reminds you to use such systems.

If you need more information about the collection, reuse and recycling systems, please contact your municipal or provincial waste-disposal centre. You can also contact us if you need more information about the effects of our products on the environment.

Technical details

Dimensions	190 x 78 x 85 mm
Ring tone	Adjustable volume
Weight	415 grams
Dialling method	Tone dialling
Network	The Maestro 1045 functions on the analogue network (PSTN) of Belgacom.
Number redial	Last dialled number, subject to a maximum of 32 characters
Sound level of receiver	Adjustable
Flash button/putting calls through	Flash signals

Declaration of conformity



Declaration of Conformity

We,

Supplier: **Isolectra B.V.**
Department: **Consumer Communications**
Address: **P.O. Box 444**
2900 AK CAPELLE AAN DEN IJSSEL
The Netherlands

declare under our sole responsibility that the product

Product name: **Maestro™ 1045**

Description: **Corded telephone**

is in conformity with the *essential requirements* and *other relevant requirements* of article 2 of the R&TTE Directive (1999/5/EC).

The product is compliant with the following standard and/or normative documents:

Safety

According to the essential requirements of the Directive 2006/95/EC, product specification EN 60950: 2001

EMC

According to the essential requirements of the Directive 2004/108/EC, product specifications EN 55022: 1998 and EN 55024: 1998

Place and date: Capelle aan den IJssel, 1st April 2008

Name: 
Position in company: **D. Olivier**
Managing Director



Guarantee terms

The Equipment you have bought has been carefully selected by Belgacom and is covered by a two-year warranty on spare parts and labor in the event of any material or manufacturing defect, unless otherwise specified. The warranty shall be valid from the date on which the equipment is collected or delivered.

If you have any problems with the equipment, you should take it to a Teleboutique or to one of our authorized agents, in its entirety and in its original packaging, or in packaging providing the same degree of protection, together with the original receipt. The addresses for our Teleboutiques and authorized agents are given in the Information Section of the White Pages.

Your equipment will be repaired or replaced free of charge, on presentation of the receipt, in the event of any material or manufacturing defect.

Belgacom alone shall determine what repairs and/or replacements are necessary. The warranty on the repaired or replaced equipment shall end on the date on which the original warranty on the purchased equipment expires, but shall not be less than 3 months.

The warranty shall not cover:

- damage of any kind that does not predate the sale;
- any damage, faults or defects attributable to the Customer or to causes unrelated to the Equipment: lightning, power surges, humidity, accidental damage, improper use or poor maintenance, failure to comply with the instructions in the user manual, and force majeure;

- the repair or replacement of movable parts (cords, wires, plugs, aerials, etc.), consumables (cells, batteries, paper, ink, etc.) needing regular replacement and the supply of cleaning products.

The warranty shall not apply:

- to any changes or repairs to the terminal Equipment undertaken by the Customer himself/herself or through the services of persons not designated by Belgacom;
- if the Customer removes or tampers with the manufacturer's serial numbers and/or brand names on the terminal Equipment.

Belgacom shall not be liable for any indirect or immaterial loss sustained by the Customer as a result of the malfunctioning of the terminal Equipment, such as any loss of production, revenue or contracts.

The General Terms and Conditions for the Sale of Terminal Equipment can be obtained on request from any Belgacom service available to the public or at www.belgacom.be

belgacom

Belgacom SA under public law,
Bd. du Roi Albert II 27, B-1030 Brussels VAT BE
0202.239.951, Brussels Register of Legal Entities

Please keep in a safe place

Device:

Serial number:

Date of purchase, replacement or repair (*)

Name and address of the buyer:

Telephone number of the relevant technical
department:

Stamp:

(*) Please delete as appropriate

belgacom

Wall mounting

