

Alcatel-Lucent 8115 Audiooffice

User guide

R100

8AL90050USAAed02



• IMPORTANT INFORMATION	3
• SAFETY GUIDELINES	3
1. DISCOVER YOUR ALCATEL-LUCENT 8115 AUDIOFFICE DOCK	4
• BOX CONTENT	4
• YOUR ALCATEL-LUCENT 8115 AUDIOFFICE	4
2. SET-UP	5
• CONNECT YOUR DEVICES	5
• CONNECT A USB HANDSET (OPTIONAL)	5
3. USE	6
• PLACING OR RECEIVING AN ALCATEL-LUCENT DESKPHONE CALL IN JACK MODE	6
• ADJUSTING THE VOLUME	6
• ACTIVATING AND DESACTIVATING THE MUTE	6
• ACTIVATING AND DESACTIVATING THE SPEAKERS	6
• OPTIONAL USB HANDSET	6
• UPDATING YOUR ALCATEL-LUCENT 8115 AUDIOFFICE	6
4. TECHNICAL DATA	7
• ALCATEL-LUCENT DESKPHONES COMPATIBILITY	7
• CONNECTIVITY	7
• TECHNICAL SPECIFICATIONS	7
• BUTTONS	7
5. WARRANTY	7
6. SUPPORT	7
7. ANNEX	8
• INSTALLING AUDIOFFICE OPTIONAL USB HANDSET	8
• USING AUDIOFFICE OPTIONAL USB HANDSET	9
8. SAFETY AND REGULATORY INSTRUCTIONS	10
• DECLARATION OF CONFORMITY FOR THE EUROPEAN UNION	10
• U.S. FEDERAL COMMUNICATIONS COMMISSION (FCC) COMPLIANCE STATEMENT	10
• ENVIRONMENT	10
• LEGAL	10

Important information

Safety Guidelines

Required Power Supply

This dock is powered through a mains AC 100-240V supply.

Warning


- Do not open the base or charger.
- Please ensure that no liquid comes into contact with the product.
Do not expose the device to excessive smoke, dust, mechanical vibration or shock.
- Only use the cables, adapters and batteries supplied.
- Place the unit near an accessible electrical outlet.
- Do not expose the device to excessive heat, e.g. to direct sunlight or near heating equipment.
- Do not use in areas where there are risks of explosion.

Operating and storage temperature


Use the device in a room where the temperature is always between 0 and 40°C (32 to 104°F).

1. Discover your Alcatel-Lucent 8115 Audiooffice dock


Box content

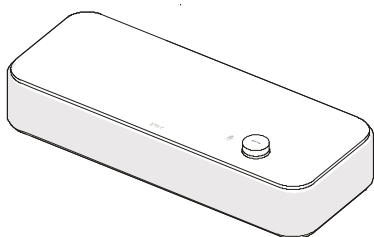

Alcatel-Lucent 8115 Audiooffice base




AC adapter



Jack 3.5 mm cable
USB type A - type B cable

Your Alcatel-Lucent 8115 Audiooffice

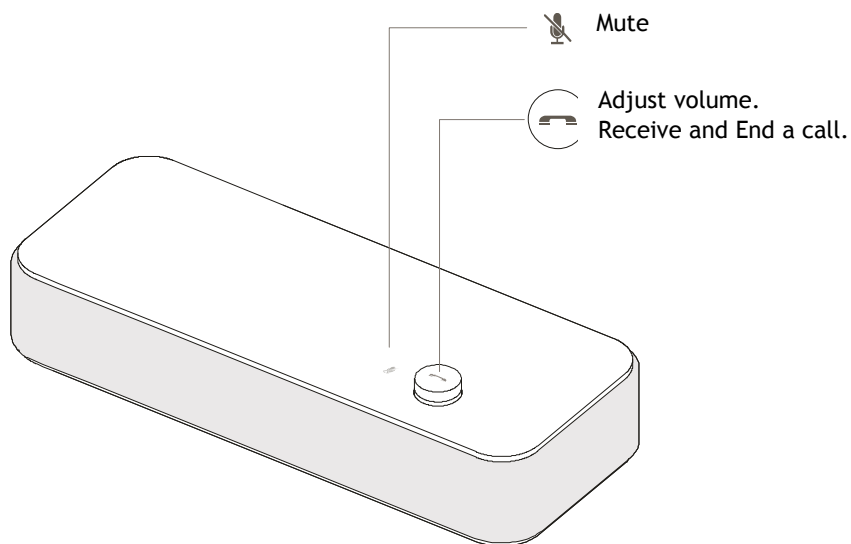


Designed and produced by innoxia, Paris

2. Set-up


Place your Alcatel-Lucent 8115 Audiooffice near your mains supply socket.

Once installed, to benefit from the best sound quality avoid placing any objects (walls or cumbersome objects) within a range of 20cm.

1. Plug the mains power adapter into the back of the base and into a wall mount socket.

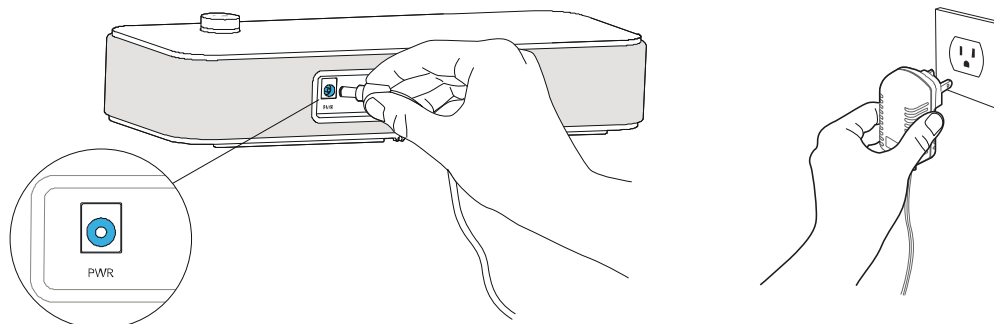


2. Press the On / Off button at the back of the base.

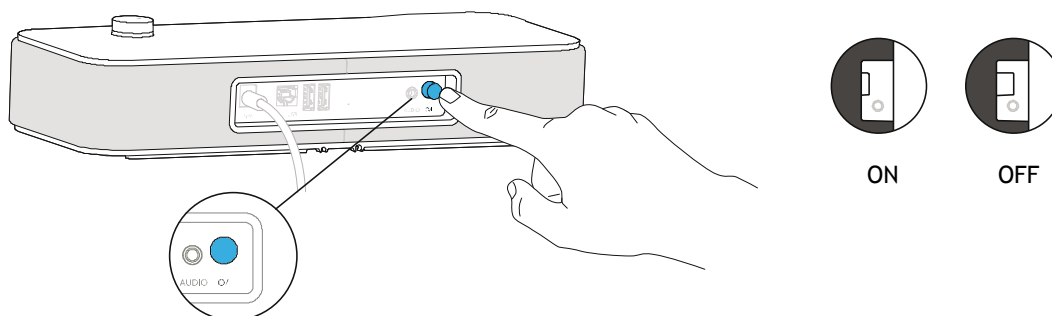

Connect your devices

The USB slave port is to connect your computer to have the sound on the 8115, the two USB masters ports are there to allow you to charge other devices like smartphones and tablets.

The 3.5 mm jack allows you to connect your Alcatel-Lucent IP deskphone.

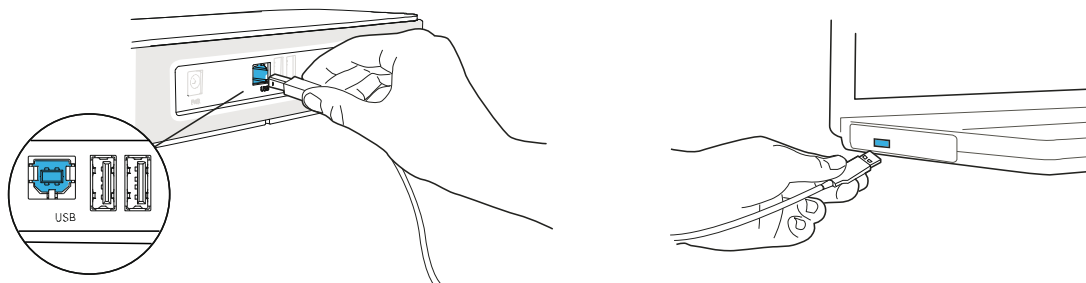

Connect a USB handset (optional)

A USB handset (available in option) may be plugged to one of the two USB masters ports at the back of the base.

3. Use

Use Alcatel-Lucent 8115 Audiooffice as a conference module for your Alcatel-Lucent Deskphone or for your Alcatel-Lucent Softphone on your mobile.

Placing or receiving an Alcatel-Lucent Deskphone call in jack mode

Upon jack connection to the Alcatel-Lucent Deskphone, user needs to configure the jack interface to “External Handsfree” in order to use it for conference.

The jack connected, dial from your Alcatel-Lucent Deskphone and press the Alcatel-Lucent 8115 Audiooffice volume button to use it as a conference device.

To end the call, hang up the call from the phone.

Muting a call can be done with the Audiooffice Mute button or thru the Alcatel-Lucent Deskphone Mute key.

Adjusting the volume

Turn the volume button to regulate the volume coming from the speakers.

Activating and deactivating the mute

Tap the Mute icon from your Alcatel-Lucent deskphone or directly from the Alcatel-Lucent 8115 Audiooffice icon.

Activating and deactivating the speakers

To accept a call in speaker mode or to switch to speaker mode during a call, press the volume button on the base.

Optional USB handset

You can order an optional USB handset shipped with a smart holder.

The optional USB handset allows to benefit from a clear sound for individual call and keep you away from mobile airwaves with a great listening comfort.

To answer a call, pick-up the handset or press the volume button.

To end a call, hang-up the handset on the smart-holder or press the volume button when in handsfree.

You can switch from handset to handsfree:

- In handsfree, to switch to the handset, just pick-it-up.
- With the handset, press the volume button to switch in handsfree.

Beware: in handsfree if you press the volume button, you'll hang-up the call, you won't switch to the handset.

Updating your Alcatel-Lucent 8115 Audiooffice

To always benefit from the last features and acoustics improvements made to the Alcatel-Lucent 8115 Audiooffice, we regularly updates the device firmware.

Use a USB Stick and follow this link https://businessportal.alcatel-lucent.com/alugesdp/faces/gesdp/products/Listing.jspx?PRODUCT=AudiOffice_8115_8125&DOCTYPE=Software&BOXES=product%2Cdoctype&OPENFOLDER=product.AudiOffice_8115_8125 and go into the 8125-8115 section under "Phones".

Download the last available firmware version. Save it in root of the USB stick, then insert the USB key into your Audiooffice. The volume button led flashes during the update and is kept enlightened when the firmware is up-to-date.

You may then turn the base Off, remove the USB stick and turn the base On again.

4. Technical Data

Alcatel-Lucent DeskPhones compatibility

Made for 8012, 4028/4029, 4038/4039, 4068 Alcatel-Lucent Deskphones
8028/29, 8038/39, 8068, 8068BT Premium Deskphones
8082 Smart Deskphone



Connectivity

1 USB slave port
2 USB port
1 jack 3.5 mm input and output

Technical Specifications

Power supply: 100-240V / 12V 3A AC adapter
Dimensions: 29x11,5x5,25cm
Operating temperature: 0 °C - 40 °C
Weight: 0,9 kg
Humidity: 10% - 90%

Buttons

On/ Off button
 Volume / Answer button
 Mute

5. Warranty

The standard Alcatel-Lucent Enterprise warranty will apply to the dock and not accessories.
Details are available at <https://business.portal.alcatel-lucent.com> under the customer section category
Hardware Support.

6. Support


e-Support from the Alcatel-Lucent Business Partners Web site : <https://businessportal.alcatel-lucent.com> click
under “Let us help you” the eService Request link.
e-mail: Ebg_Global_Supportcenter@alcatel-lucent.com

7. Annex


Installing Audiooffice Optional USB Handset




1. Plug Handset cord into the right USB port at the back of the base.

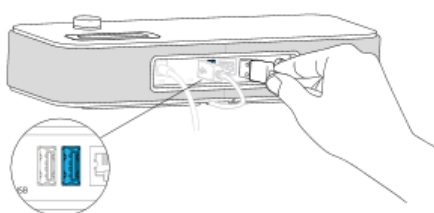

2. Place the Smart Holder and the Handset on the top of the base.

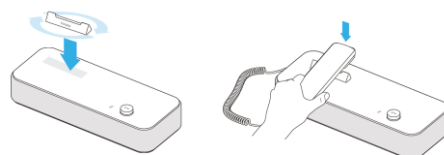

3. Press the On/Off button at the back of the base.

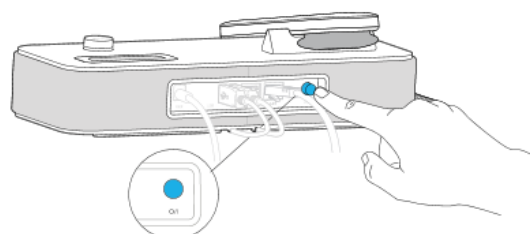

Using Audiooffice Optional USB Handset

Receiving a Mobile Call

1. Pick-up the handset from its base.
2. To accept a call in speaker mode or to switch to speaker mode during a call, press the volume button on the base.
3. In a speaker mode call when the handset is still picked-up, pushing the volume button will toggle between handset and speaker mode.

When the handset is on the smart holder, pushing the volume button will hang up the call.

Ending a Mobile Call

1. By replacing the handset on the base.
2. In speaker mode, by pressing the volume button.

Mobile or Personal Computer VoIP Call

1. Use your Mobile or Personal Computer VoIP Application to receive and end a VoIP call.
2. In a speaker mode call when the handset is still picked-up, pushing the volume button will toggle between handset and speaker mode.

The volume button and handset can't be used as a pick-up / hang-up direct solution in this configuration.

8. Safety and regulatory instructions

Declaration of Conformity for the European Union

Invoxia declares that the Alcatel-Lucent 8115 Audiooffice product complies with the essential requirements and other relevant provisions of the European RTTE Directive 1999/5/EC on Radio and Telecommunication Terminal Equipment.



U.S. Federal Communications Commission (FCC) Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

To comply with the FCC RF exposure compliance requirements, this device and its antenna must not be co-located or operating to conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

Environment



Your Alcatel-Lucent 8115 Audiooffice dock has been designed and manufactured using quality materials and components which can be reused and recycled. The presence of the crossed-out wheeled bin symbol indicates that the product complies with EU Directive 2002/96/EC.

It must be disposed of through an appropriate collection and recycling structure.

Please contact your local electrical and electronic equipment waste management scheme.

Please respect your local municipal regulations and do not dispose of these products with unsorted household waste.

The correct disposal of products at the end of their working life is good for the environment and your health.

Legal

Alcatel-Lucent, Alcatel-Lucent 8115 Audiooffice and related trademarks, names and logos are the property of Alcatel-Lucent.

Invoxia ®, Audiooffice™ are registered trademarks of Invoxia.