

**Handset** (possibility of a cordless - Bluetooth® handset - Forum™ iPhone 750 only)

**Indicator light**

- flashing green: incoming call
- flashing red: alarm

Adjust the tilt of the screen



Socket for connecting headphones or a Hands-free / Loudspeaker unit

Alphabetic keypad

**Display and display keys**

Contains several lines and pages providing information on calls and the functions accessible via the 10 keys associated with the words on the screen.

- Transfer icon:** pressing the key next to this icon allows you to program or change the transfer function.
- Headset connected.**
- Silent mode activated.**
- Appointment programmed.**
- Telephone locked.**
- Display keys:** pressing a display key activates the function shown associated with it on the screen.

**Navigation**

- OK key:** used to validate your choices and options while programming or configuring.
- Left-right navigator:** used to move from one page to another.
- Up-down navigator:** used to scroll through the content of a page.
- Back/Exit key:** to return to previous menu (short press) or return to first screen (long press); during a conversation, provides access to welcome screens (Menu, Info,...) and to return to the conversation icon screens.

**Welcome screens**




**Menu page:** contains all functions and applications accessible via the keys associated with the words on the screen.

**Perso page:** contains call line keys (allowing supervision of calls) and programmable call keys.

**Info page:** contains information on the telephone and the status of its functions: name, telephone number, number of messages, activation of transfer function, appointment reminder, etc.

**Call display**

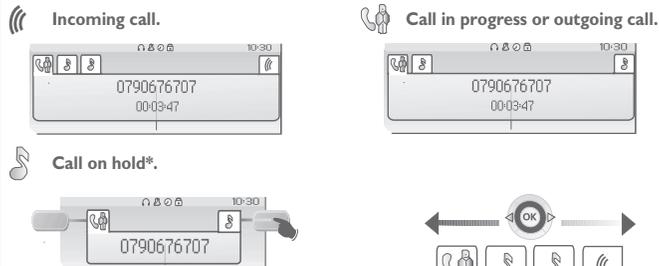

If you get two calls at the same time, you can switch from one call to the other by pressing the display key associated with each call.

**Left-right navigator:** used to check calls.

**Function keys and programmable keys**

- Guide key:** used to obtain information on functions of the "menu" page and to program key of the "perso" page.
- Messaging key to access various mail services**  
If the key flashes, a new voice message or a new text message has been received.
- "Redial" key:** To access the "Redial" function.
- Programmable key (F1 and F2 keys)**  
Lit when the function associated with the key is activated.

**Bluetooth® receiver (Forum™ iPhone 750 set only)**

**Indicator light**  
**Flashing green:** correct operation.  
**Green steady:** handset charging (the indicator light is goes out when the handset is charged).



**Off-hook/On-hook and Volume/Mute keys**

**On-hook / Off-hook:** press this key to answer or terminate a call

**Flashing orange:** low battery or handset out of range.  
**Orange steady:** faulty operation.

**Volume/Mute key**  
- consecutive presses to adjust the handset volume (3 levels)  
- long press so that your correspondent can no longer hear you

**Using your telephone**

**Identify the terminal you are on**

Info

The number of your telephone is displayed on the "Info" page.

Access the **Info** page using the navigator.

**Making a call**



To make an external call, dial the outside line access code before dialling your correspondent's number.


**Receiving a call**



**Redialling**



**Make a call-back request to a busy number**



**Audio keys**

- Hang-up key:** to terminate a call.
- Hands-free/Loudspeaker Key:** to make or answer a call without lifting the receiver.
  - lit in hands-free mode or headset mode (short press).
  - flashing in loudspeaker mode (long press).
- Intercom/Mute key:**
  - During a conversation: press this key so that your correspondent can no longer hear you.
  - Terminal idle: press this key to answer calls automatically without picking up the receiver.
- To adjust the loudspeaker or handset volume up or down**

**Extension unit**




An extension unit can be fitted to your telephone. This provides additional keys which can be configured as function keys, line keys, call keys etc.  
**To affix labels:** push the holding strip of the unit backwards to you and lift it. Install the label under the keypad, in the housing designed for, and place the keypad back into position.

## During a conversation

### Sending DTMF signals

During a conversation you sometimes have to send DTMF signals, such as with a voice server, an automated attendant or a remotely consulted answering machine. The function is automatically cancelled when you hang up.



during a conversation

### Calling a second person during a conversation

During a conversation, to call a second person.



dial directly the number for your call

### Transferring a call


During a conversation, to transfer the call to another number:



number to be called


### Three-way conference

During a conversation, a second call is on hold.

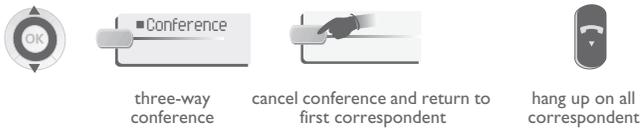

### Divert your calls to another number

### Divert your calls to another number / Using your voice mailbox

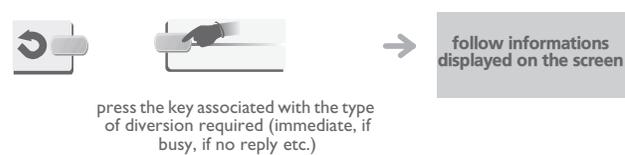


### When you return, cancel all diversions



## Voice message service


### Consulting your voice mailbox

If the key flashes, a new voice message or a new text message has been received.

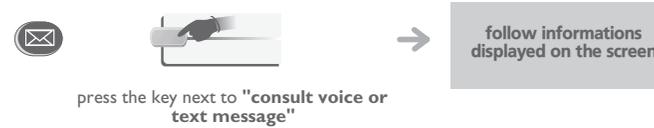


## Directory

### Using call by name

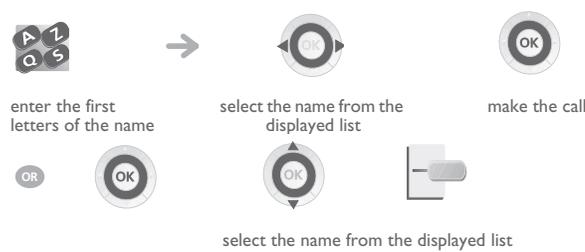

### Program your call keys

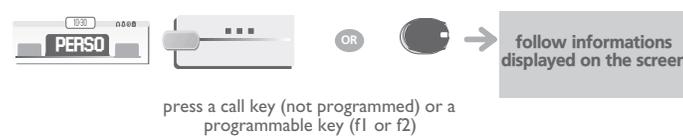


### Make calls via your programmed call keys



### Customize your terminal

The customization functions of the telephone are accessed from the **Menu** page.


### Modifying your personal code

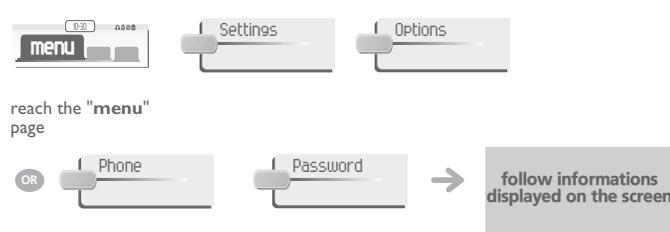


## Lock / unlock your telephone



### Adjusting the audio functions

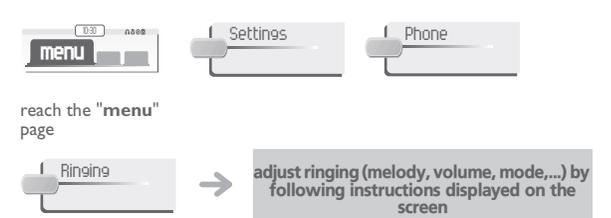

### Adjusting screen brightness Forum™ iPhone 740/ Forum™ Phone 740

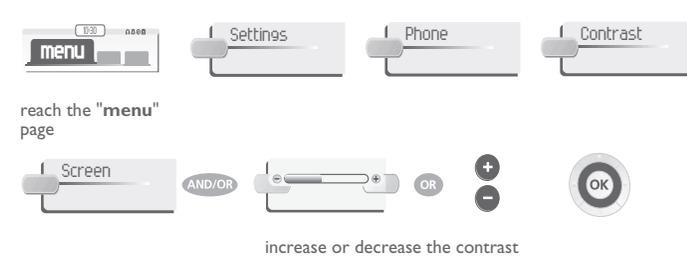

## Guarantee and clauses

This document describes the services available on telephones in the Forum iPhone range connected to a Belgacom Forum 700 or Forum 750. For more information, please consult the User Guide for your Forum™ iPhone 740/750 (IP set) or Phone 740 (digital set). Contact your installer.

Warning: never place your telephone in contact with water. To clean your telephone, you may however use a damp soft cloth. Never use solvents (trichlorethylene, acetone, etc.) which may damage the plastic parts of your telephone. Never spray it with cleaning products. The ear piece and microphone area of the handset may attract metallic objects that may be dangerous for the ear.

The wording is not contractual and may be subject to change. Some functions of your telephone are controlled by a software key and the configuration of the unit.

EC: We, Alcatel Business Systems, hereby declare that we assume the Forum™ iPhone 740/750 or Phone 740 product to be compliant with the essential requirements of Directive 1999/5/CE of the European Parliament and Council.

A copy of the original of this declaration of compliance can be obtained from your installer.

**Forum™ iPhone 750 & Bluetooth® handset** This device uses a radio frequency spectrum the use of which has not been harmonized in all EC countries. The frequency spectrum may be shared by other applications and its use is subject to the following two conditions: (1) this device may not cause harmful interference, (2) this device must accept any interference received, including interference that may cause undesired operation. This device complies with Class B of part 15 of the FCC (Federal Communications Commission) rules or with the CISPR 22 standard. This device has been designed and manufactured so that it does not exceed the limits in radio frequency energy in SAR (Specific Absorption Rate) established by the different countries concerned.

The SAR (Head and torso) measured is 0.0023 W/kg (the maximum globally accepted limit is 0.08 W/kg). Collection of these products at the end of their product life must be done selectively.

### Environmental information

1- The equipment that you bought has required the extraction and use of natural resources for its production. It may contain hazardous substances for the health and the environment. 2- In order to avoid the dissemination of those substances in our environment and to diminish the pressure on the natural resources, we encourage you to use the appropriate take-back systems. Those systems will reuse or recycle most of the materials of your end life equipment in a sound way. 3- The crossed-bin symbol invites you to use those systems. 4- If you need more information on the collection, reuse and recycling systems, please contact your local or regional waste administration. 5- You can also contact us for more information on the environmental performances of our products.

Belgacom, in keeping with its policy of constant product improvement for the customer, reserves the right to modify product specifications without prior notice. Copyright © Alcatel Business Systems. 2004. All rights reserved.

